

The **BA324G loop powered 4/20mA** indicator is an intrinsically safe field mounting instrument with a large 5 digit display housed in a robust IP66 GRP or stainless steel enclosure.

Main application of the BA324G is to display a measured variable in engineering units within a hazardous area. The zero and span of the display are independently adjustable allowing the indicator to be calibrated to display any linear variable represented by the 4/20mA signal. A root extractor and an adjustable sixteen segment lineariser enable the indicator to display flow and variables such as tank level in linear engineering units. For weighing applications a tare function is included.

A large 29mm high 5 digit display and 31 segment bargraph provide maximum contrast and have a very wide viewing angle, allowing the BA324G indicator to be easily read in most lighting conditions over a wide temperature range. An optional factory fitted backlight is available for installations in poorly illuminated areas. The five digits, with four decimal points and a negative sign, may be configured to display any variable between -99999 and 99999.

IP66 protection is provided by a robust GRP or 316 stainless steel enclosure, both have thick armoured glass windows and silicone gaskets. Impact and ingress protection have been assessed by UKAS accredited bodies. The BA324G is surface mounting but can be pipe or panel mounting using accessories.

IECEX, ATEX and ETL intrinsic safety gas and dust certification permit world wide installation. The 4/20mA input terminals comply with the requirements

for *simple apparatus* which, together with the low voltage drop, allow the indicator to be connected in series with most intrinsically safe 4/20mA loops.

Display backlighting which may be loop or separately powered is available as a factory fitted option. It provides green background illumination allowing the display to be read at night or in poorly illuminated areas. When powered from the 4/20mA loop, no additional intrinsically safe interface or wiring is required and the indicator input remains compliant with the requirements for *simple apparatus*. Powering from a separate supply produces a slightly brighter backlight but requires an additional intrinsically safe interface.

Optional dual alarm outputs which can switch hazardous or safe area loads, such as sounders, beacons or solenoid valves, are available as a factory fitted option. The two galvanically isolated solid state outputs may be independently conditioned as high or low alarms with normally open or closed outputs. Annunciators on the display show the status of both alarms.

The scale card which shows units of measurement and tag information slides into an internal slot and can easily be changed on-site. New instruments can be supplied with the scale card printed to show customer specified information for no additional charge. If this is not requested, a blank card is fitted which can easily be marked on-site.

Reliability is ensured by protection from incorrect connection and radio frequency interference. The indicator has been subjected to extensive vibration and thermal testing and is supported by a three year guarantee.

BA324G BA324G-SS 2-wire 4/20mA 5 digit indicator

Intrinsically safe for use in all gas & dust hazardous areas

- ◆ IP66 GRP or stainless steel enclosure.
- ◆ Intrinsically safe ATEX, IECEX, ETL and cETL certification.
- ◆ Loop powered only 1.2V drop.
- ◆ 5 digit 29mm high display & 31 segment bargraph.
- ◆ Optional backlight & alarms.
- ◆ Root extractor, lineariser and tare function.
- ◆ Easy scale card installation on-site.

◆ 3 year guarantee




BEKA associates

Sales & Support Distributor:-
Stockshed Limited. Stoneycroft House,
Mud Lane, Eversley. Hampshire.
RG27 0QS. U.K. Tel. (0118) 9734955
e-mail info@stockshed.com


SPECIFICATION

Input	
Current	4 to 20mA HART® transparent
Voltage	Less than 1.2V at 20°C Less than 1.3V at -40°C Less than 5V with optional loop powered backlight.
Overrange	±200mA or ±30V will not damage the indicator
Display	
Type	Liquid crystal, non-multiplexed 5 digits 29mm high
Span	Adjustable between 0 & ±99999 for a 4/20mA input
Zero	Adjustable between 0 & ±99999 with 4mA input
Decimal point	1 of 4 positions or absent
Polarity	Automatic minus sign
Zero blanking	Blanked apart from 0 in front of decimal point
Direction	Display may increase or decrease with increasing 4/20mA input.
Reading rate	2 per second
Bargraph	31 segments 80mm long
Overrange	99999 or -99999 with all decimal points flashing
Push buttons	
	(Function in display mode)
▼	Shows display with 4mA input
▲	Shows display with 20mA input
P	Displays input in mA or as a % of span, has a modified function when alarms are fitted.
E	Used for tare function
Accuracy at 20°C	
Linear	±0.02% of span ±1 digit
Root extracting	±16µA at input ±1 digit.
Temperature effect on:	
Zero	Less than 25ppm of span/°C
Span	Less than 50ppm of span/°C
Series mode rejection	Less than 0.05% of span error for 1mA pk to pk 50 or 60Hz interference.
Intrinsic safety	
Europe ATEX	
Code	Group II Category 1GD Ex ia IIC T5 Ga Ex ia IIIC T80°C Da IP66 -40°C ≤ Ta ≤ 70°C
Input parameters	
Ui	30V dc
Ii	200mA
Pi	0.84W
Output parameters	
	Comply with requirements for simple apparatus.
Cert. No.	ITS11ATEX27253X (Special conditions only apply for Zone 0)
International IECEx	
Code	Ex ia IIC T5 Ga Ex ia IIIC T80°C Da IP66 -40°C ≤ Ta ≤ 70°C
Parameters	
	As ATEX
Cert. No.	IECEx ITS 11.0014X (Special conditions only apply for Zone 0)
USA & Canada ETL & cETL	
Code	Class I, Div 1, Gp A, B, C, D T5 USA & Canada Class I, Zone 0, AEx ia IIC T5 Ga USA -40°C ≤ Ta ≤ 70°C
	Class II, Div 1, Gp E, F, G, Class III, Div 1 USA & Canada Zone 20 AEx ia IIIC T80°C Da USA -40°C ≤ Ta ≤ 60°C
	Ex ia T5 Ga -40°C ≤ Ta ≤ 70°C Canada Ex ia IIIC Da -40°C ≤ Ta ≤ 60°C
ETL control No	4008610
USA & Canada Nonincendive	
Code	Class I, Div 2, Gp A, B, C, D T5 USA & Canada Class II, Div 2, Gp F, G Class III, Div 2 -40°C ≤ Ta ≤ 70°C
ETL control No.	4008610
Environmental	
Operating temp	-40 to +70°C
Storage temp	-40 to +85°C
Humidity	to 95% at 40°C noncondensing
EMC	Complies with EMC Directive 2014/30/EU
Mechanical	
Enclosure	
Material	GRP or 316 stainless steel
Ingress protection	IP66
Impact protection	Enclosure 7J, Window 4J
Weight	
GRP	1.1kg
Stainless steel	2.6kg
Terminals	Blue with screw clamp for 0.5 to 1.5mm² cable
Scale card	Slide-in card showing units of measurement and tag information through display window.

DIMENSIONS (mm)

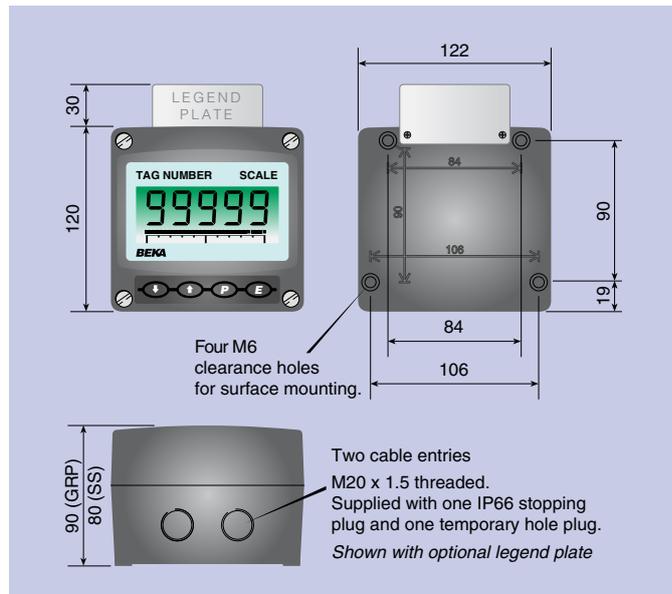

TERMINAL CONNECTIONS

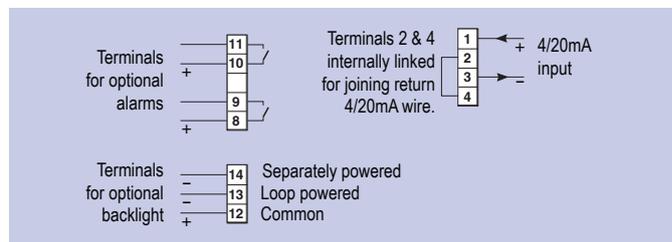

Accessories

Backlight	Green, may be loop or separately powered
Loop powered	Indicator input voltage 5V
Separately powered	11V at 35mA from IS interface
Alarms	Two alarm outputs each of which may be independently configured as a high or low alarm contact with a NO or NC output.
Output	Isolated, voltage free solid state switch complying with requirements for simple apparatus.
Ron	5Ω + 0.7V max
Roff	1MΩ min
Legend plate	Stainless steel plate laser engraved tag number or application information attached to rear of the instrument, visible from the front. #
Pipe mounting kit	BA393G 316 stainless steel #
Panel mounting kits #	
For BA324G & BA324G-SS	
BA394G	Mounts indicator into an open panel aperture, does not seal aperture.
For BA324G	
BA494G	Mounts indicator into an open panel aperture & seals aperture
For BA324G-SS	
BA494G-SS	Mounts indicator into an open panel aperture & seals aperture
Back-box terminals for BA324G.	Including 4/20mA loop maintenance diode

See accessory datasheet for details

HOW TO ORDER

Model number	Please specify	
GRP enclosure	BA324G	
Stainless steel enclosure	BA324G-SS	
Display mode	Linear, root or lineariser	
Display at:		
4.000mA	XXXX	Include position of decimal point & sign if negative.
20.000mA	XXXX	
Scale card marking		
Units	Legend required	
Tag	Legend required	
Accessories	Please specify if required	
Display backlight	Backlight	
Dual alarms	Alarms	
Stainless legend plate	Legend required	
Pipe mounting kit	BA393G	
Panel mounting kit	BA394G, BA494G or BA494G-SS	
Back-box terminals	Back-box terminals	